



# TEAC®

# UR-50BD

High-Definition Medical Image Recorder



Now You Could Record High Definition Video from Imaging Modality  
with the Most Compatible Format Available

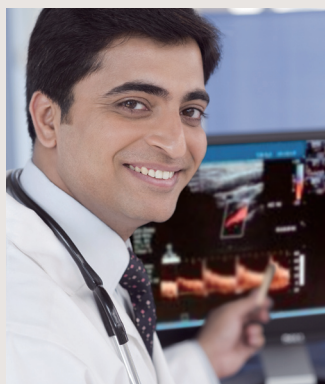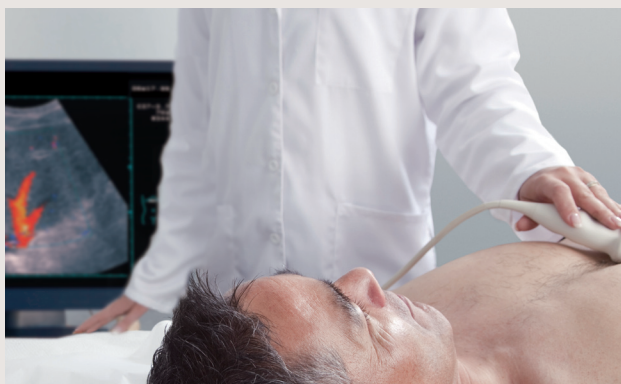

# HDMI


Based on many years of experience and product knowledge of medical imaging and recording, TEAC introduces the UR-50BD, the solution for undiluted high-definition medical recording.

UR-50BD high-definition medical image recorder supports not only industry standard NTSC/PAL formats, but also high-definition video/audio format to be compatible with several medical imaging modalities which tend to generate high-resolution images to be recorded onto BD/DVD media or archived onto external USB Flash Drive/HDD.

Excellent quality recording provided by TEAC UR-50BD maximizes the efficiency of studies.

## Features



- Real-Time Direct Recording to Removable Media (Blu-Ray/DVD, USB Flash, USB Hard Drive, etc.)
- All-in-One Unit with No PC Required.
- High-Resolution Data Archiving via DVI (& HDMI).
- Hard Disk Drive (HDD) Embedded for the Data Backup.
- The Backed-Up Data (50GB x 2) on HDD Inside Can Be Retrieved to Removable Media for the Inexpensive (Digital File) Distribution of the Patient Study and Report.
- Recorded Data to Removable Media is STB and PC Compatible.
- Front Panel USB Port Provides Easy Access for USB Memory/USB HDD.
- RS-232C and USB Control.

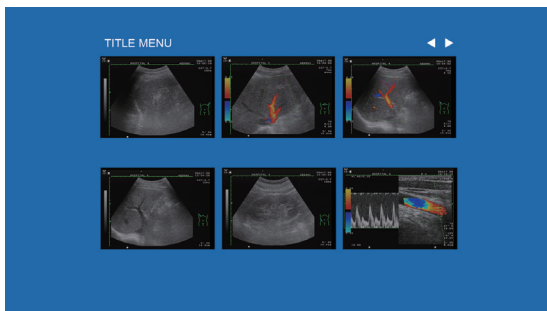

Title Menu




# Connection, Definition and Media

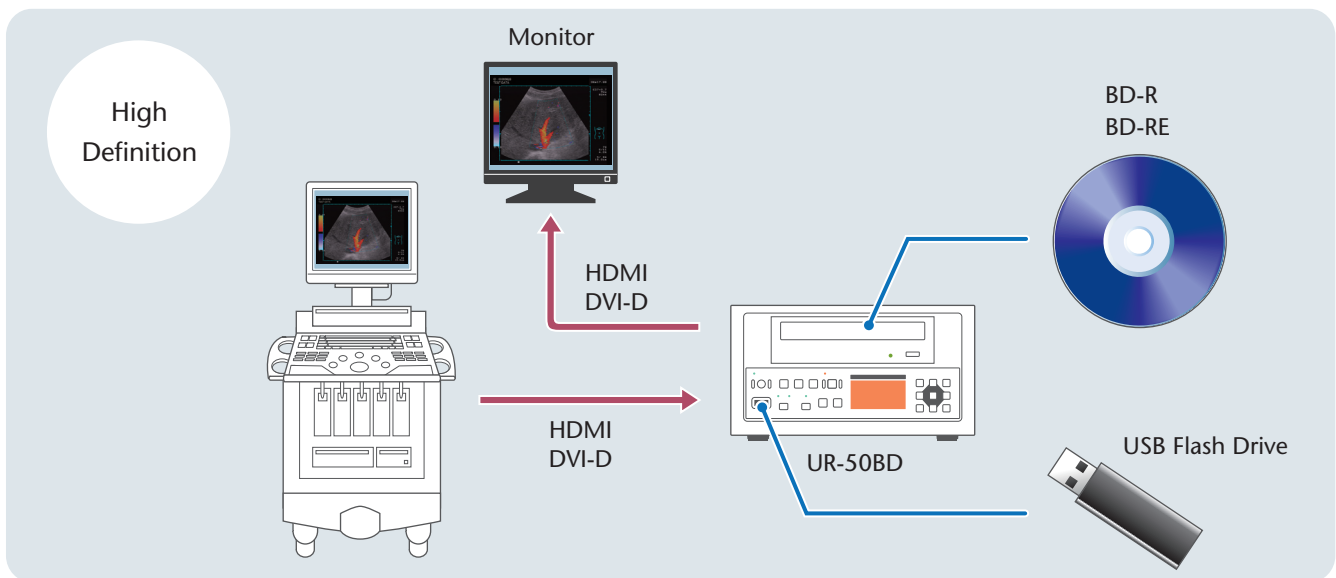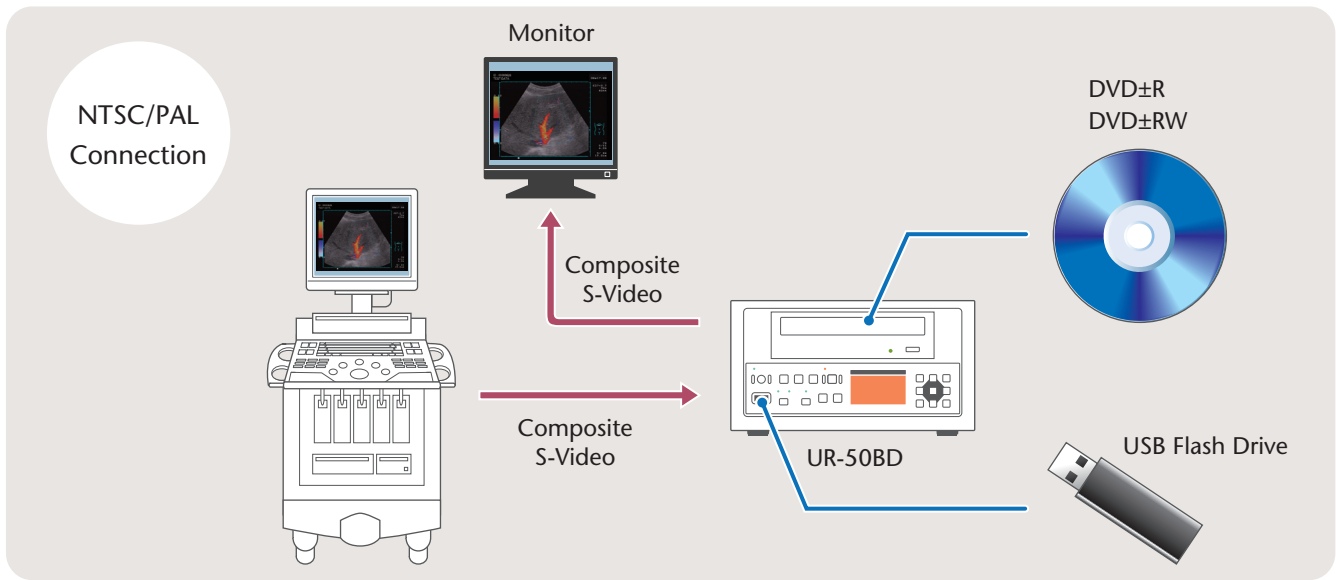

# Recording Format

Input Format	Recording Format
NTSC	Full D1 720 x 480
PAL	Full D1 720 x 480
SVGA 800 x 600	720P 1280 x 720
960 x 720	720P 1280 x 720

Input Format	Recording Format
XGA 1024 x 768	720P 1280 x 720
SXGA 1280 x 1024	1080i 1920 x 1080
WSXGA+ 1680 x 1050	1080i 1920 x 1080
1080i 1920 x 1080	1080i 1920 x 1080
1080p 1920 x 1080	1080i 1920 x 1080

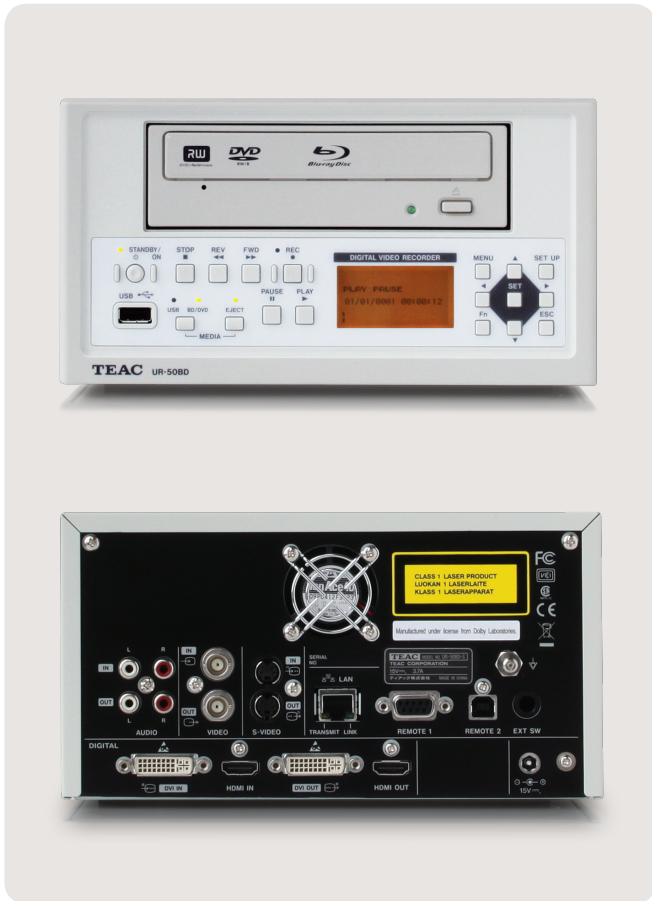

## UR-50BD Specifications

Recordable media		
USB Flash Drive/ USB HDD	NTSC/PAL input	DVD-Video
	High-Definition	BDAV
DVD Disc	Recordable capacity	Max. 2 TB
	NTSC/PAL input	
	DVD-R, DVD-RW	DVD-Video
	DVD+R, DVD+RW	DVD-Video
BD Disc	Recordable capacity	Max. 8.5 GB (DL Disc)
	High-Definition	
	BD-R, BD-RE	BDAV
Recordable capacity		Max. 50 GB (DL Disc)

Internal hard disk drive		
100 GB		

Recording format		
NTSC/PAL	MPEG2 PS	DVD-Video
High-Definition	MPEG2 TS	BDAV
	H.264	BDAV

Input for Video/Audio		
NTSC/PAL	BNC	1 Vp-p 75 Ω
	S-VIDEO	1 Vp-p 75 Ω Luminance
		NTSC: 0.273 Vp-p 75 Ω Chrominance
		PAL: 0.3 Vp-p 75 Ω Chrominance
High-Definition	HDMI	
	DVI-D	
Audio	RCA	-8 dBs min 10 kΩ, unbalanced
	HDMI	with Video Input

Output for Video/Audio		
NTSC/PAL	BNC	1 Vp-p 75 Ω
	S-VIDEO	1 Vp-p 75 Ω Luminance
		PAL: 0.3 Vp-p 75 Ω Chrominance
High-Definition	HDMI	
	DVI-D	
Audio	RCA	-8 dBs 1 kΩ, unbalanced
	HDMI	with Video Output (two channels)

Audio format		
NTSC/PAL	AC-3 RCA Analog	
High-Definition	AC-3 RCA Analog / HDMI	
Sampling	48 kHz / 16 bits	

Power supply		
AC adapter	Input	100 to 230 VAC 50/60 Hz
	Output	+15 VDC 60 Wmax

Dimensions		
Approx. 8 1/2 W x 4 5/8 H x 11 3/8 D in (214 W x 117 H x 290 D mm)		

Weight		
Approx. 8.8 lb (4.7 kg)		

Environmental condition		
Operating temperature	41 to 104 deg F (5 to 40 deg C)	
Storage temperature	-4 to 140 deg F (-20 to 60 deg C)	
Operating humidity	5 to 80% (No condensation)	

Interface		
RS-232C / USB (Virtual Serial Port)		
10BASE-T / 100BASE-TX		

External input		
mini jack (for external trigger)		

Medical standard		
Safety	IEC6060-1, CSA60601-1, EN60601-1	
EMC	IEC60601-1-2, CSA60601-1-2, EN60601-1-2	
	FCC class B, VCCI class B	
Certifications	CSA NTRL/N	
	CE Mark	
	FCC Class B	

HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

DVD Logo is a trademark of DVD Format/Logo Licensing Corporation.

"Blu-ray Disc", "Blu-ray" and "Blu-ray Disc" logo are trademarks of Blu-ray Disc Association.

Other company names, product names and logos in this document are the trademarks or registered trademarks of their respective owners.

\*Features and specifications are subject to change without notice.

## TEAC Europe GmbH

Bahnstr.12, 65205 Wiesbaden-Erbenheim, Germany  
 Tel.: +49-(0)611-7158-0  
 Fax: +49-(0)611-7158-393  
 Email: info@teac.de  
 http://www.teac.eu