

26" 3D HD Medical Display


FSN Medical Technologies has display monitors that lead the way in technology, clarity, and reliability in today's interventional procedure facilities and minimally invasive surgery suites. FS-P2607D is our 26" 3D-capable medical display. This unit features advanced motion adaptive deinterlacing, enhanced low-angle processing, improved low-motion detection, and advanced 3D noise reduction. It includes excellent 3D comb filter performance for use with PAL and NTSC applications.

- Multiple 3D formats, parallax adjustment, left/right swap
- 3D mode is turned on for 3D, or off for 2D
- Image consistency and clarity that fosters clinical confidence
- Maximum 3D quality for maximum depth perception
- Refined design using extensive medical industry installations
- Detailed images for today's MIS procedure room




FS-P2607D displays 3D video in a variety of formats. The input/output connections on this monitor include dual DVI, dual 3G-SDI, and on-board DC out power for smaller component needs. This unit features LED backlight technology and an engineered polymer housing. 3D glasses are included.

Accurate Color Reproduction

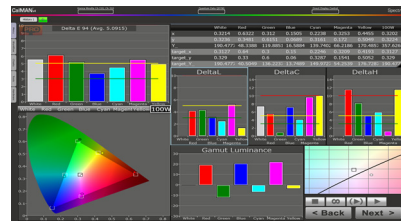

FSN has implemented methods to fine-tune the properties of our displays. Distinct color space settings have been calibrated to well-known surgical color preferences.

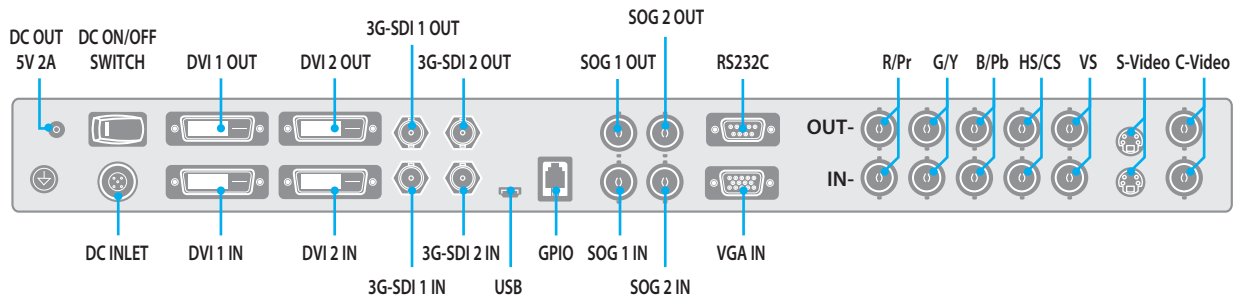


FSN displays have the connections you need. All major inputs are accepted via the back side connection panel.

Specifications


General Features

Item	Description
Panel	26" inch TFT LCD (IPS)
Resolution	1920 x 1080 pixel (HD 1080)
Aspect Ratio	16 : 9
Active Area	576.0 X 324.0 mm
3D technology	Xpol® plus specialized filters
Optimum 3D Viewing Distance	1350 mm
Supported 3D Formats	<ul style="list-style-type: none"> Side-by-Side Top-Bottom (DVI2, SDI1, SDI2 (DVI1 is not supported)) Line-by-Line Dual-Input DVI1(Left)/DVI2(Right), SDI1(Left)/SDI2(Right)
Input Signal - 3D	2 x DVI-D 2 x SD/HD/3G-SDI (BNC)
Input Signal - non 3D	2 x DVI-D 2 x SD/HD/3G-SDI (BNC) 2 x SOG 1 x VGA (D-sub) 1 x C-Video (BNC) 1 x S-Video (DIN) 1 x Component (RGBS, YPbPr) (5 x BNC)
Output Signal	2 x DVI-D 2 x SD/HD/3G-SDI (BNC) 2 x SOG 1 x C-Video (BNC) 1 x S-Video (DIN) 1 x Component (RGBS, YPbPr) (5 x BNC)
GPIO Port	Swap, PIP / PBP1 / PBP2 Select, Record indicator
User Control	8 Buttons OSD Control, RS232 Control, GPIO Control
Power Consumption	Under 70 Watt
Plug & Play	DDC 2B
DDC CI	Support
Unit Dimension	668(W) x 421(H) x 88.8(D) mm 26.3(W) x 16.6(H) x 3.5(D) inch
Weight	8.2 kg, 18 lbs
Pixel Pitch	0.3 (W) x 0.3 (H)
Contrast Ratio	1400 : 1 typical
Viewing Angle (CR>10)	R/L 178, U/D 178 (non 3D)
Response Time (G-to-G)	8 ms (avg.)
Surface Luminance	900 cd/m ²

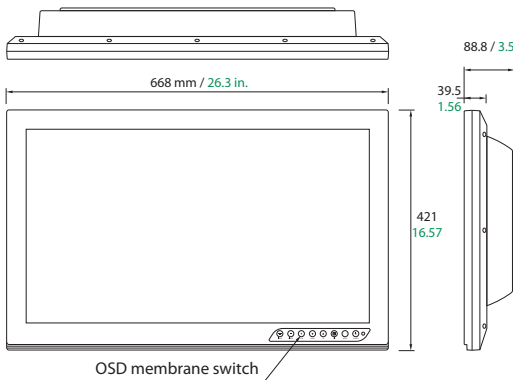

Output Signal Timing

Signal	Type	Description
DVI	Type	Digital RGB
	Signal Format	TMDS single link
	Connector	DVI-D
C-Video	Type	C-Video
	Color system	NTSC, PAL
	Signal Format	Composite Video Signal
S-Video	Type	S-Video
	Color system	NTSC, PAL
	Signal Format	Y/C Separated Video Signal
SDI	SMPTTE-425M	1080p (60 / 59.94 / 50)
	SMPTTE-274M	1080i (60 / 59.94 / 50)
	SMPTTE-296M	720p (60 / 59.94 / 50)
	SMPTTE-260M	1035i (60 / 59.94)
	SMPTTE-125M	480i (59.94)
Component Video	ITU-R BT.656	576i (50)
	Type	Analog Y/G, Pb/B, Pr/R
	Connector	BNC
VGA Sync	Level	0.7Vp-p ±5%
	Polarity	Positive
	Impedance	75 ohm ±5%
	Horizontal frequency	30 ~ 93KHz
	Vertical frequency	50 ~ 85Hz
DVI	Applicable max. pixel frequency	170MHz
	Maximum resolution	1920x1080 / 60Hz (148.5MHz Timing, NON-CRT)
	Type	H/CS,VS
Component Sync	Level	TTL Level (V high ≥2.0V, V low ≤0.8V)
	Polarity	Positive or Negative
	Connector	BNC
SOG	Type	Sync on green
	Input Signal Level	1.0Vp-p (Video :0.7Vp-p / Sync :0.3Vp-p)
	Impedance	75 ohm ±5%
	Input Signal Frequency	MAX. 162MHz
	Connector	BNC

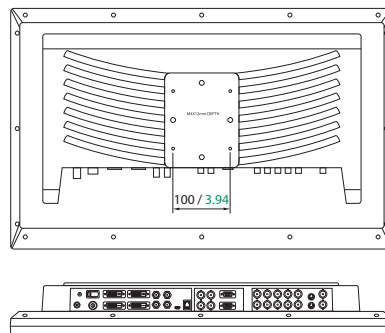

Input Signal Timing

Signal	Type	Description
VGA Video	Type	Analog RGB
	Connector	DSUB-15
	Level	0.7Vp-p ±5%
	Polarity	Positive
	Impedance	75 ohm ±5%
DVI	Horiz. frequency	30 ~ 93KHz
	Vertical frequency	50 ~ 85Hz
	Applicable max. pixel frequency	170MHz
Component Video	Max. resolution	1920x1200 / 60Hz (154MHz Timing, NON-CRT)
	Type	Separate H/V sync, Composite H/V sync, Sync On Green Automatic synchronization without external switch
	Level	TTL Level (V high ≥2.0V, V low ≤0.8V)
VGA Sync	Polarity	Positive or Negative
	Range	Automatic synchronization for applicable resolution modes which follows industrial standard within frequency range of 30 to 93KHz in horizontal and 50 to 85Hz in vertical
	Terminal resistance	more than 2KΩ
DVI	Type	Digital RGB
	Signal Format	TMDS single link
	Connector	DVI-D
C-Video	Type	C-Video
	Color system	NTSC, PAL
	Signal Format	Composite Video Signal
S-Video	Type	S-Video
	Color system	NTSC, PAL
	Signal Format	Y/C Separated Video Signal
SDI	SMPTTE-425M	1080p (60 / 59.94 / 50)
	SMPTTE-274M	1080p (30 / 29.97 / 25 / 24 / 24sF / 23.98 / 23.98sF)
	SMPTTE-296M	720p (60 / 59.94 / 50)
	SMPTTE-260M	1035i (60 / 59.94)
	SMPTTE-125M	480i (59.94)
Component Video	ITU-R BT.656	576i (50)
	Type	Analog Y/G, Pb/B, Pr/R
	Connector	BNC
VGA Sync	Level	0.7Vp-p ±5%
	Polarity	Positive
	Impedance	75 ohm ±5%
	Horizontal frequency	30 ~ 93KHz
	Vertical frequency	50 ~ 85Hz
DVI	Applicable max. pixel frequency	170MHz
	Maximum resolution	1920x1080 / 60Hz (148.5MHz Timing, NON-CRT)
	Type	H/CS,VS
Component Sync	Level	TTL Level (V high ≥2.0V, V low ≤0.8V)
	Polarity	Positive or Negative
	Connector	BNC
SOG	Type	Sync on green
	Input Signal Level	1.0Vp-p (Video :0.7Vp-p / Sync :0.3Vp-p)
	Impedance	75 ohm ±5%
	Input Signal Frequency	MAX. 162MHz
	Connector	BNC

Xpol® is a registered trademark of Arisawa Mfg. Co. Ltd.

Specifications are subject to change with or without notice. Doc. # FSN1967 Rev. 3/16