


58-inch widescreen surgical monitor with 4K UHD display that faithfully reproduces surgical images.

4K UHD Surgical Display

This monitor uses an LCD panel with an energy-efficient LED backlight, a brightness of 500 cd/m² and a contrast ratio of 5000:1. It displays in 4K UHD resolution (3840 x 2160 pixels), and faithfully reproduces surgical images in high definition for endoscopy and microsurgery.

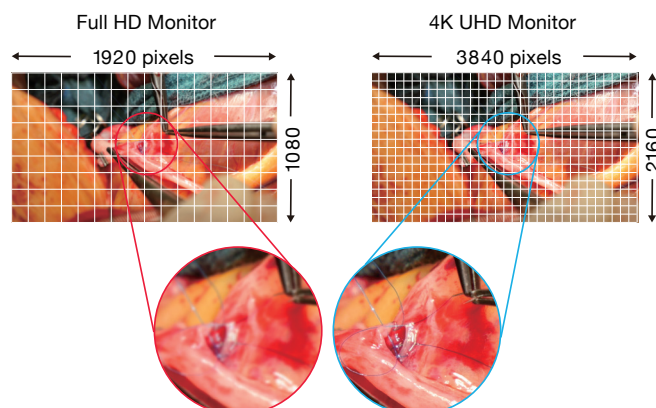

Delay-Free Display of Images

In single source mode, 4K images, as well as full HD images shot by conventional endoscopy and surgical cameras can be displayed in high definition without any delay, making full use of the monitor's 4K UHD resolution.



CuratOR® EX5841

Flawless Picture Reproduction

The use of state-of-the-art LCD technology allows distortion-free image geometry. The applied TFT panel enables a very large viewing angle and high brightness. The EX5841 provides a flicker-free picture, even at low refresh rates, thereby adhering to the strictest ergonomic requirements.

Protective Screen Against Damages

The monitor is covered with a protective screen which helps protect the LCD screen from shock, scratches and dirt. This fully protects the front against foreign material and splashes with a protection rating of IP45; the entire device has IP32 protection.

Viewing Multiple Signals on One Screen

In dual source mode, two separate signal sources can be viewed simultaneously on one monitor screen side-by-side using the PaP (Picture-and-Picture) function. With the PiP (Picture-in-Picture) function a second signal can be displayed above the main signal. The size and position of the display window is adjustable when using PiP. In triple source mode, three signal sources can be displayed on the monitor screen, representing a third signal above two signals displayed side-by-side. This is useful when several images need to be viewed at once such as multiple modalities.

Various Input/Output Signal Support

The monitor supports various video input and output signals for connecting to different types of modality equipment. Furthermore, a communication interface allows image switching by external surgical equipment.

4K UHD Connection with Only One Cable

With 12G-SDI (BNC), DisplayPort 1.2, and HDMI, 4K UHD signals can be displayed at up to 60 frames per second with a single cable. Furthermore, all cables can be locked onto the monitor for consistent connection. With the 12G-SDI (BNC) terminal, stable transmission is possible even over long distances of up to 30 m.

Preset Functions for Easy Switching

Various setting such as the input terminal selection, brightness, grayscale tones, color gamut, etc., can be stored in the monitor as preset functions. These settings can be named according to operators' preferences through easy operation of the preset button.


Comfortable View from Any Angle

The monitor has a viewing angle of 178 degrees, ensuring that images viewed from various directions with minimal changes in contrast.


Specifications

Cabinet Color		White (RAL 9002)
Panel	Type	Color TFT LCD Panel
	Backlight	LED
	Size	147.3 cm / 58"
	Native Resolution	3840 x 2160 (16:9 aspect ratio)
	Viewable Image Size (H x V)	1270 x 721 mm
	Pixel Pitch	0.331 x 0.334 mm
	Display Colors	10-bit colors (SDI/DisplayPort): 1.07 billion (maximum) colors 8-bit colors: 16.77 million colors
	Viewing Angles (H / V, typical)	178° / 178°
	Brightness (typical)	500 cd/m ²
	Calibrated Brightness	350 cd/m ²
	Contrast Ratio (typical)	5000:1
Video Signals	Input Terminals	DisplayPort 1.2, HDMI, DVI-D Single Link, BNC (12G-SDI)
	Output Terminals (Loop Through)	BNC (12G-SDI)
External Communication Interface		RS232, Ethernet, USB
USB	Upstream	USB 2.0: Type-B Hub
	Downstream	USB 2.0: Type-A x 2 USB 2.0: Type-A for service
Power	Power Requirements	AC 100 - 240 V: 50 / 60 Hz
	Maximum Power Consumption	appr. 200 W
	Typical Power Consumption	appr. 130 W (at 250 cd/m ² , native LUT, without external load)
	Power Save Mode	0 W (power switch off) < 20 W (external power off) < 35 W (external power on)
Power Management		DMPM
Features & Functions		PIP, PaP
Physical Specifications	Net Weight (without stand)	≤ 45 kg
	Hole Spacing(VESA standard)	400 x 400 mm and 400 x 200 mm, M8.8, depth 10-15 mm
Environmental Requirements	Degree of Protection	IP45 (front), IP32 (rear)
Certifications & Standards (Please contact the EIZO group company or distributor in your country for the latest information.)		CE (Medical Device Directive), IEC/EN60601-1, CAN/CSA C22.2 No. 601.1, ANSI/AAMI ES60601-1, EN60601-1-2 Class B, FCC-B, RCM, RoHS, China RoHS, WEEE
FDA		Class I
Supplied Accessories (May vary by country. Please contact EIZO for details.)		Power cable (eu, us, cn), screws for VESA adapter x 4 (preassembled), CD-ROM (Instructions for Use), general safety instructions

Dimensions (Unit: mm)

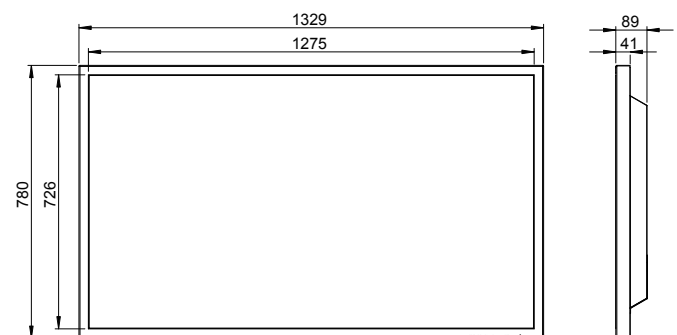

Connector

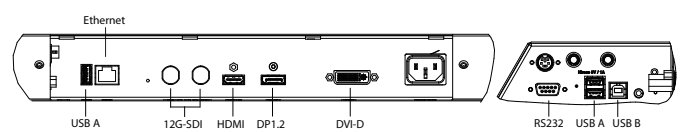

You will find your EIZO contact partner at:
www.eizo-or.com/contact

All product names are trademarks or registered trademarks of their respective companies. EIZO, the EIZO Logo, and CuratOR are registered trademarks of EIZO Corporation. Specifications are subject to change without notice.