

# JVC

2 Megapixel 21.3" Color Monitor

# CCL214



## 2 Megapixel Color Monitor

Cost effective 2MP color monitor  
in pursuit of enhanced functions

21.3"

500  
cd/m<sup>2</sup>

1200:1

16Bit  
LUT

DisplayPort  
&  
DVI-D

Calibration  
Function

Color  
Front  
Sensor

Uniformity  
Equalizer


Dynamic  
Gamma

Auto  
Text  
Mode

LED  
Backlight

## Dynamic Gamma

Color images are automatically recognized to provide optimized contrast, brightness and gamma. No user intervention is required.

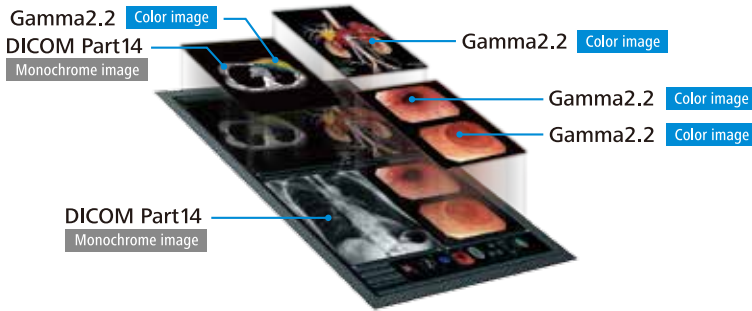


## Auto Text Mode

Automatic brightness control for text data to reduce eye strain for patient lists and reporting application.



## Luminance Stabilizing System λ-Sentinel

With two built-in sensors for luminance stabilization and ambient light measurement, CCL214 consistently delivers unmatched image quality.

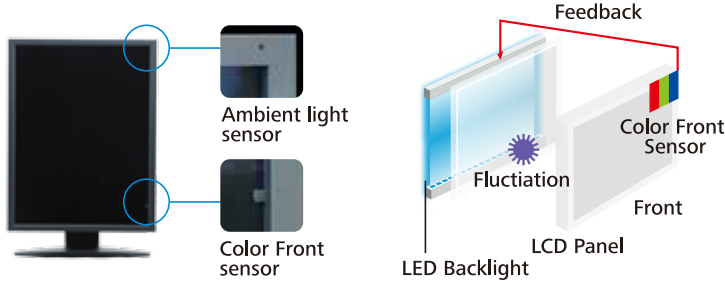

## Uniformity Equalizer

Luminance and color uniformity correction system produces stable images across the screen.


## DICOM Conformance Check

User friendly OSD functions include DICOM conformance check function.

## Specifications

	<b>Model Name</b>	CCL214
<b>LCD Panel</b>	<b>Technology</b>	21.3" color TFT IPS technology
	<b>Display Area</b>	324 mm × 432 mm
	<b>Pixel Pitch</b>	0.270 mm × 0.270 mm
	<b>Contrast Ratio</b>	1200 : 1 (typ.)
	<b>Maximum Luminance</b>	500 cd/m <sup>2</sup> (typ.) 280 cd/m <sup>2</sup> · 250 cd/m <sup>2</sup> (calibrated)
<b>Visual Performance</b>	<b>Viewing Angle</b>	178° vertical and horizontal
	<b>Native Resolution</b>	1200 × 1600
<b>Interface</b>	<b>Input Signal</b>	DVI-D (DVI 1.0 compliant) DisplayPort (DisplayPort 1.1a compliant)
	<b>Plug and Play</b>	DDC2B compliant
<b>Input Power Supply</b>	<b>Input Power Supply</b>	100 V - 240 V 50 / 60 Hz
	<b>Maximum Power Consumption</b>	48 W (typ.)
<b>Features</b>	<b>Calibration Control</b>	Luminance, Gamma, Color temperature Capable of storing 3 sets of LUT (Optional calibration kit is required)
	<b>OSD Information Display</b>	Model name, Serial No., Total operating time, Calibration settings (Operating time since last calibration, Luminance, Gamma), Current Luminance, Color temperature and Ambient light, DICOM conformance
	<b>USB Hub</b>	USB Rev.2.0 compliant, Self-powered USB upstream connector (×1), USB downstream connector (×2)
	<b>Other Features</b>	Uniformity Equalizer, Hardware pivot, LED indicator, Advanced power management, Dynamic Gamma, Auto text mode, λ-Sentinel, Multiple LUT, Self DICOM check
<b>Approvals</b>		ANSI/AAMI ES60601-1 (2005) + A1 (2012), CAN/CSA-C22.2 No. 60601-1 (2014), CE (EN60601-1, EN60601-1-2), RCM, FCC Part15 subpart B Class B, ICES-003-B, VCCI-B, FDA510(k), J-Moss, RoHS
<b>Physical Characteristics</b>	<b>Dimensions (W × H × D)</b>	Landscape : 474 mm × 471.4 / 532.9 mm × 220 mm Portrait : 367 mm × 524.9 / 586.4 mm × 220 mm
	<b>Weight</b>	11.1 kg
	<b>Tilt Stand</b>	Tilt, Swivel, Portrait / Landscape
	<b>Mount</b>	VESA standard (100 mm × 100 mm)
	<b>Security Slot</b>	Anti-theft security slots (display and tilt stand)
<b>Accessories</b>		Power cord, DVI cable, USB cable, User manual

## Dimensions (mm)

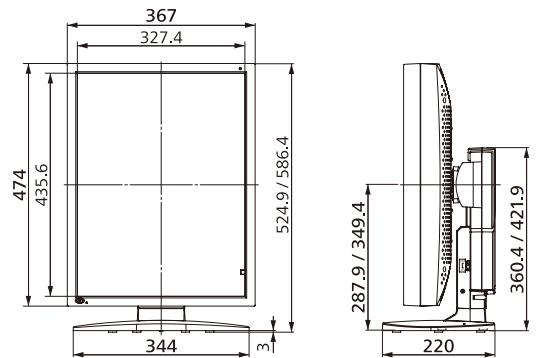

## Interface



●“JVC” is a brand of medical and industrial monitors manufactured and sold by JVCKENWOOD Corporation. ●Company names and product names are the registered trademarks of the respective companies. ●Product specifications and appearance are subject to change without notice. ●Colors in photographs may differ from actual colors due to the printing process. ●Images on screens are simulated.

 <b>Safety Precautions</b>	<ul style="list-style-type: none"> <li>●Please read the user's manual for safe and proper use.</li> <li>●Do not expose the product to dust, moisture, steam, or oily smoke. It could cause fire, electric shock, or a failure.</li> </ul>
Healthcare Business Division JVCKENWOOD Corporation 3-12, Moriya-cho, Kanagawa-ku, Yokohama-shi, Kanagawa, 221-0022, JAPAN TEL: +81-45-450-1908 FAX: +81-45-450-1926 E mail : medical-display.j@jvckenwood.com JVC Healthcare Website : http://healthcare.jvc.com/	

Please contact our distributor below with inquiries and orders.